


DS-2CE56D0T-IT1/IT3

HD1080P EXIR Turret Camera

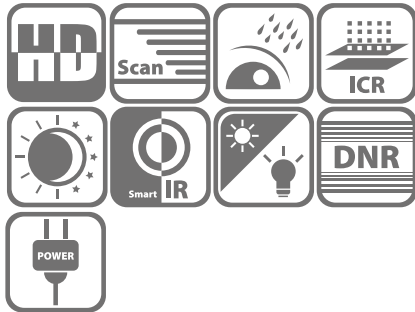


Key features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night, Smart IR
- EXIR technology, up to 40mIR distance
- IP66 weatherproof

Available Models

DS-2CE56D0T-IT1, DS-2CE56D0T-IT3

Dimension

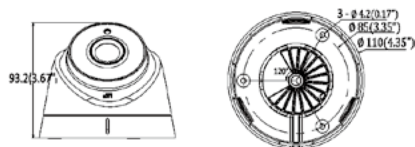

Accessories



	DS-2CE56D0T-IT1	DS-2CE56D0T-IT3
Camera		
Image Sensor	2MP CMOS Image Sensor	
Signal System	PAL/NTSC	
Effective Pixels	1920(H)*1080(V)	
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR	
Shutter Time	1/25(1/30)s to 1/50,000s	
Lens	2.8mm, 3.6mm, 6mm optional	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 103°(2.8mm), 82.2°(3.6mm), 54°(6mm)	Angle of View: 103°(2.8mm), 82.2°(3.6mm), 54°(6mm), 37.7°(8mm), 24.2°(3.6mm), 18.8°(6mm)
Lens Mount	M12	
Day & Night	ICR	
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°	
Synchronization	Internal synchronization	
Video Frame Rate	1080p@25fps/1080p@30fps	
HD Video Output	1 Analog HD output	
S/N Ratio	>62dB	
General		
Operating Conditions	-20 °C - 45 °C (-4 °F - 113 °F), Humidity 90% or less (non-condensing)	
Power Supply	12 VDC±15%	
Power Consumption	Max. 4W	
Protection Level	IP66	
IR Range	Up to 20m	Up to 40m
Dimensions	Φ110 × 93.2 mm(Φ4.33" × 3.67")	
Weight	350 g	

NETWORK CAMERA
 PTZ CAMERA
 ANALOG CAMERA
 NVR
 DVR
 ATM DVR
 CARD
 TRANSMISSION CONTROL AND DISPLAY
 NETWORK STORAGE
 ACCESS CONTROL
 INTRUSION
 VIDEO INTERCOM